

# ITCertTest



<p><b>Instant Update</b></p> <p>We are checking our exam questions all the time.</p> 	 <p><b>Security &amp; Privacy</b></p>	 <p>24/7 customer support</p>
<p><b>Free Demo Download</b></p> <p>Try before you buy, Download a free sample of any of our exam questions and answers.</p> 	<p><b>One Year Free Update</b></p> <p>Free update is available within One Year after your purchase.</p> 	

<http://www.itcerttest.com>

IT exam study guide / simulations

**Exam** : **HP0-Y49**

**Title** : **HP ATP FlexNetwork Solutions**

**Vendor** : **HP**

**Version** : **DEMO**

NO.1 The HP Virtual Connect (VC) product is found within which HP FlexNetwork Architecture component?

- A. FlexBranch
- B. FlexFabric
- C. FlexManagement
- D. FlexCampus

**Answer:** B

Reference: <http://h20195.www2.hp.com/V2/GetPDF.aspx%2F4AA4-8174ENW.pdf>

NO.2 Which HP ProVision switch command could a network administrator use to upgrade the operating system from an attached USB drive?

- A. Update from usb flash
- B. Copy usb flash
- C. File-management usb
- D. Upgrade usb flash

**Answer:** B

NO.3 Two routers are connected on a link and begin to form an Open Shortest Path First (OSPF) adjacency. What must match on both routers for the adjacency to form successfully?

- A. OSPF cost on the interface
- B. OSPF DR priority on the interface
- C. OSPF hello timer on the interface
- D. OSPF process ID for the network on the interface

**Answer:** C

NO.4 What is the most Fault Tolerant IRF stack topology?

- A. Cluster
- B. Daisy Chain
- C. Ring
- D. Full Mesh

**Answer:** D

NO.5 Which HP Comware component allows a network administrator to adjust the logging process?

- A. SNMP management center
- B. Information center
- C. Logging process
- D. System logging center

**Answer:** B

Explanation:

Acting as the system information hub, information center classifies and manages system information, offering a powerful support for network administrators and developers in monitoring network performance and diagnosing network problems.

The following describes the working process of information center:

NO.6 Which STP protection feature does HP recommended against rogue switches?

- A. Root Protection should be enabled on access layer switches.
- B. BPDU Protection should be enabled on edge ports and uplink ports.
- C. Root Protection should be enabled on access and aggregation layer switches.
- D. BPDU Protection should be enabled on edge ports.

**Answer:** D

Explanation:

We want to enable BPDU protection on any "edge ports", or ports that are connected to end user devices (PCs, printers, etc.) - any device that should not be sending out STP BPDU's. Without BPDU protection, a malicious (or ignorant) user could plug a switch into our network and alter the spanning tree topology.

NO.7 Which wireless technology is limited to operate in a frequency range with only three non-overlapping channels?

- A. 802.1a
- B. 802.1x
- C. 802.1ad
- D. 802.11g


**Answer:** D

Explanation:

802.11b (and 802.11g) networks offer 11 channels, but only three channels (1, 6, and 11) do not overlap with each other. In a large-scale building or campus-wide installation, the ability to use only three channels can reduce real-world throughput and make avoiding interference from other 802.11b or 802.11g-based wireless networks difficult.

NO.8 Refer to the exhibit.

Exhibit: Network topology and configuration Originally, all four switches had the same region configuration. VLAN 14 was added to Switch\_D and then mapped to instance 2. How does this affect the MSTP topology?

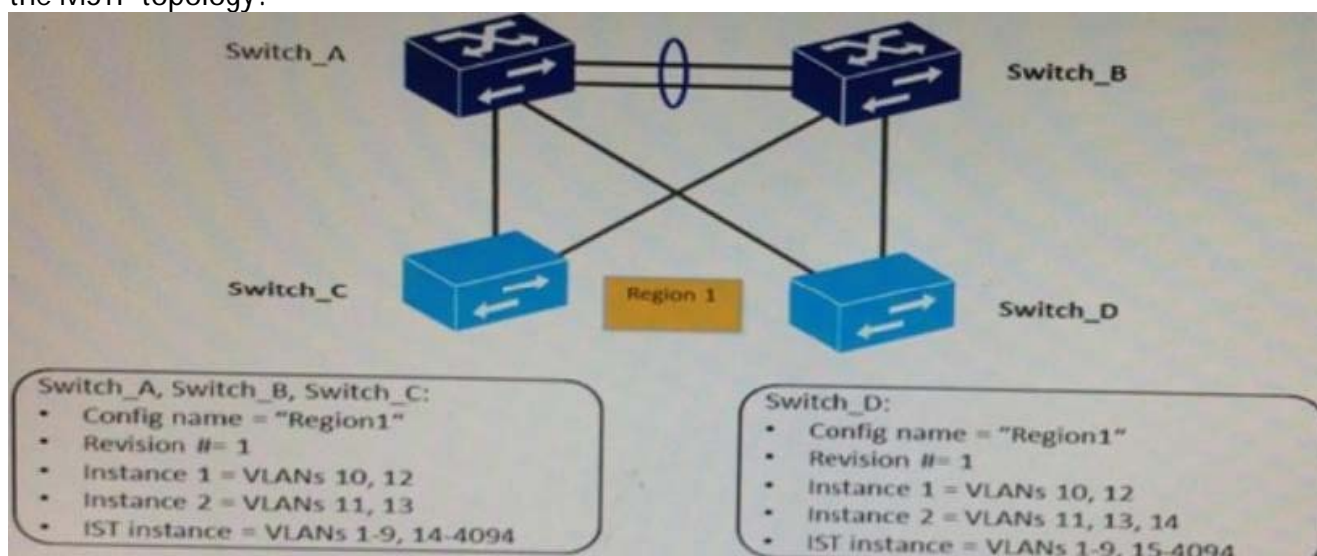

- A. Load sharing is lost, one of the uplinks is blocked for all traffic on Switch\_C and Switch\_D
- B. A layer 2 loop exists and will cause sporadic connectivity issues
- C. All connectivity is lost, both uplinks are blocked on Switch\_D
- D. Load sharing is lost, one of the uplinks is blocked for all traffic on Switch\_D

**Answer:** C

NO.9 On an HP Comware switch, which view must an administrator access in order to execute the debug command?

- A. Manager
- B. Operator
- C. System
- D. User

**Answer:** D

NO.10 Which ProVision configuration includes 10.0.3.0/24, which represents VLAN 30 in OSPF area 0 ?

- A. vlan 30 ip ospf area 0
- B. vlan 30 area 0
- C. interface vlan 30 ip ospf area 0
- D. router ospf area 0 vlan 30

**Answer:** A